


# EXPLOSION PROOF ROTARY SWITCH

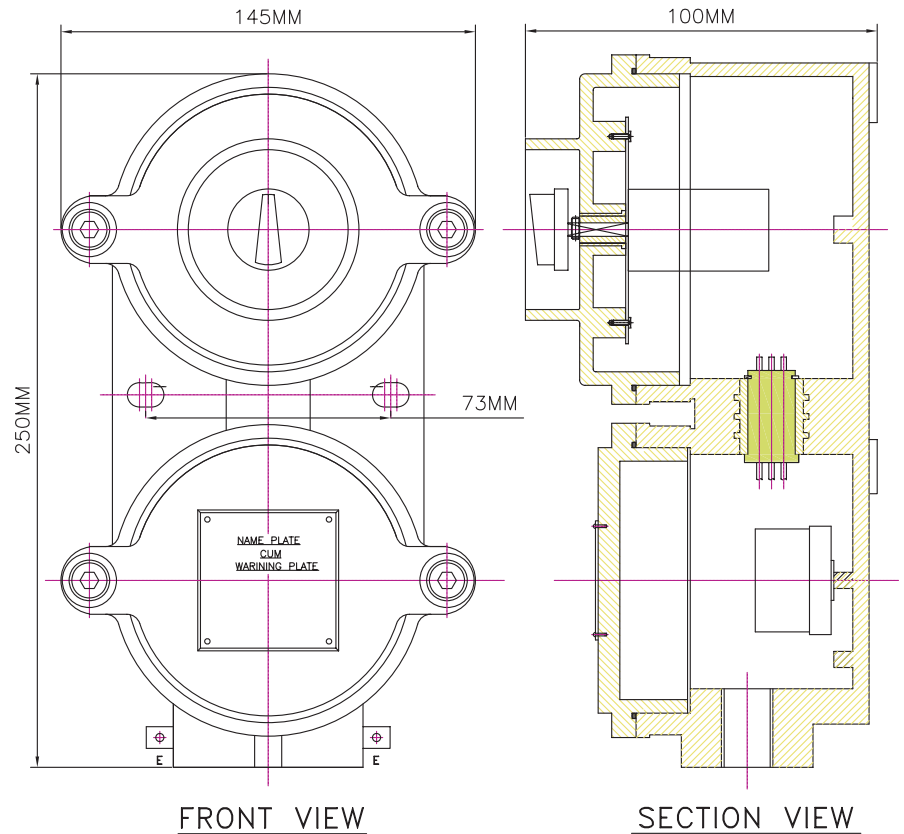

## TECHNICAL SPECIFICATION

✦ Type of Ex-Protection	:	EEx-d Type, IS/IEC60079-1:2007
✦ Zone Classification	:	Zone 1 & Zone 2
✦ Gas Group	:	IIA, IIB & IIC T6 IS/IEC60079-0:2004
✦ Ingress IP Protection	:	IP66 AS PER IS/IEC60529:2001
✦ Material of contraction	:	high Pressure Die Cast Aluminum Alloy LM6
✦ Paint	:	Epoxy Polyester Powder Coating
✦ Earthing	:	Internal -01 No. External -02 Nos.
✦ Cable Entry	:	02 Nos. for M20 ( 3/4" ET)
✦ Hardware	:	Stainless Steel
✦ AMP Rating	:	10AMP/16AMP/20AMP/25AMP/32AMP
✦ Voltage	:	110volts/220volts/500volts/690volts 50/60Hz
✦ Contact Type	:	ON+OFF 1NO+1NC
✦ Change Over Type	:	1Way/ 2Way/ 3 Way/ with and without OFF

### TRI-FLP ENGINEERS PVT. LTD.

11, 1st Floor, Popular Indl. Estate, Gokhale Compound, Raghuvir Nagar, Near Char Rasta, Dombivali East, Dist Thane 421201, MH, India.  
 Tel: +91 251 2433393 & +91 251 2452001  
 vikas@trimurtitriflp.com, triflp@gmail.com  
 Web: -www.trimurtitriflp.com

## TRI-FLP